



# Micro Style Inserts





Series Types: RSE

## Micro Style Male Insert: DC

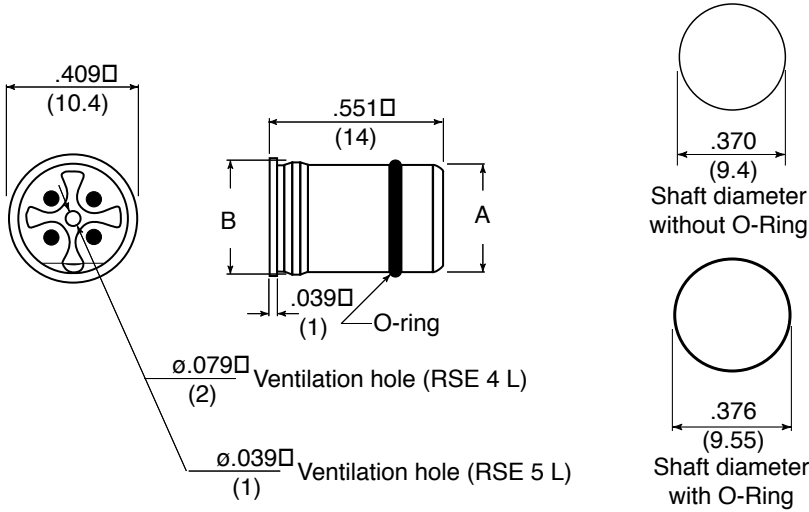


- DC, single keyway inserts
- Solder contacts
- Ideal for OEM applications
- Viton o-ring seal

### Order Information

Face View Male				
Poles	4(Ventilated)	4	5(Ventilated)	5
Insert	RSE 4L	RSE 4	RSE 5	RSE 5L
Insert	RSE 4S		RSE 5S	

**Dimensional Data**



Inches or (mm)

INSERT	A	B
RSE 4 S	.389	.396
RSE 5 S	(9.9)	(10.05)
RSE 4	.370	.376
RSE 5	(9.40)	(9.55)

**Technical Data**

- Application Class: HNE acc. to DIN 40040  
-25°C to +110°C
- Materials:
  - Contact: Copper alloy, gold over nickel plating
  - O-Ring for Receptacle: Viton
  - Insert: Nylon
- Mechanical Data:
  - Protection: IP68, NEMA 6P (only in fully locked position)
- Electrical Data:
  - Contact Resistance:  $\leq 5m\Omega$
  - Current Rating: 3A
  - Working Voltage: 250V
  - Dielectric Withstanding Voltage: 2 KVAC RMS/60sec
- Agency Approvals:
  - UL Recognition: E104696
  - CSA Certified: LR101546-1