

" Micro" Ordering Information

RKWT 4/3 – 632 / 2M

Number of Poles

4/2 = 4 pole 2 wire D.C.
 3 = 3 pole D.C.
 4 = 4 pole D.C.
 4/3 = 4 pole
 3 wire D.C.
 5 = 5 pole D.C.
 3U = 3 pole A.C.
 4U = 4 pole A.C.
 5U = 5 pole A.C.
 4/3 B = 4 pole 3 wire
 4 B = 4 pole
 5 B = 5 pole
 8 = 8 pole

Cable Length Meters or Feet

2 M	3 F
5 M	6 F
6 M	12 F
10 M	15 F
	20 F

Cable Code

632 = 22/3 PVC (D.C.)
 31 = 22/3 Irr. PVC (D.C.)
 618 = 22/3 AWM 2661 (U.S.)
 688 = 18/3 AWM 2661 (U.S./Auto)
 125 = 22/3 Irr. PVC (U.S./Auto)
 19 = 22/3 PVC (Euro D.C.)
 619 = 18/3 SOOW-A (U.S.)
 664 = 22/3 PUR (U.S./Auto)
 610 = 22/3 PUR (D.C.)
 32 = 22/3 PVC (D.C.)
 631 = 18/3 SJOO
 695 = 18/3 PVC
 631 = 18/3 SJOO
 90 = .34 mm²/3 PUR/PVC
 602 = 18/4 PUR (D.C.)
 605 = 18/4 PUR (U.S./Auto)
 629 = 18/4 SJOO
 633 = 22/4 PVC (D.C.)
 29 = 22/4 Irr. PVC (D.C.)
 674 = 22/4 AWM 2661 (U.S./Auto)
 679 = 22/4 PUR (D.C.)
 689 = 18/4 PVC
 693 = 18/4 PVC
 33 = 22/4 PVC (D.C.)
 165 = .25 mm²/4 PUR/PVC
 673 = 22/5 AWM 2661 (U.S./Auto)
 48 = 22/5 PVC (Euro A.C.)
 612 = 22/5 PVC (D.C.)
 09 = .25 mm²/7 PUR
 63 = .34mm² PUR/PVC

" Micro" Connector Series


RKT = Female Connector, Straight
 RKWT = Female Connector, 90°
 RST = Male Connector Straight
 RSWT = Male Connector, 90°
 RSF = Male Receptacle
 RKF = Female Receptacle
 RSTRKT = Male Female Extension
 RKWT/LED = Female Connector, 90° w/2-LED
 RKT/LED = Female Connector, Straight w/2-LED
 RKC = Female Field Connector, Straight
 RKCW = Female Field Connector, 90°
 RSC = Male Field Connector, Straight
 RSCW = Male Field Connector, 90°
 RSE = Male Insert

This information is to be used only as a reference to part number make-up.
 Please use Pages B2-B53 for exact part numbers.


MICRO SERIES




Available in both the European "DC" style (single key) and U.S. industry standard "AC" style (dual key). Metric (12mm) and U.S. threaded connectors available.

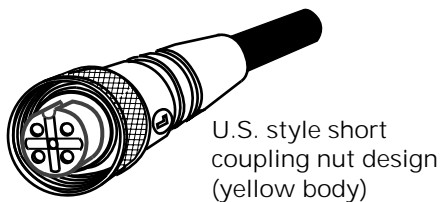

U.S. style short coupling nut design (yellow body)

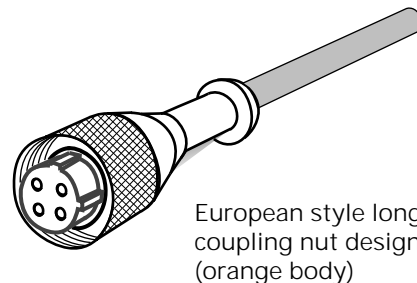

European style long coupling nut design (orange body)

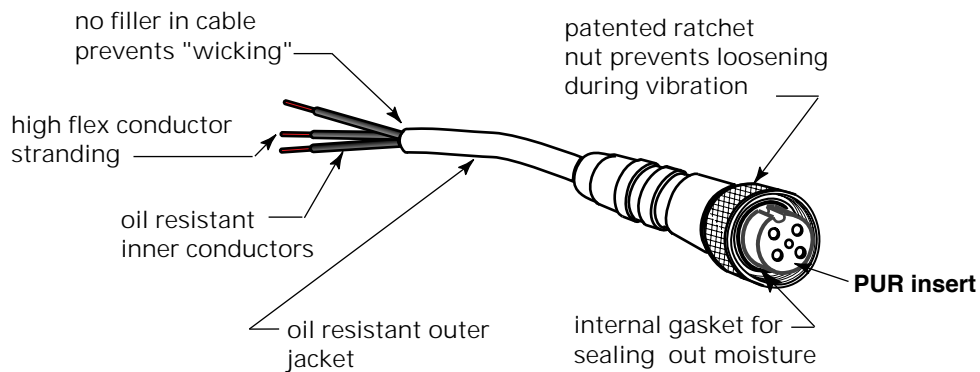

- Gold plated contacts standard
- IP68 (145psi @ 24Hrs), NEMA 6P
- 18 and 22 AWG cable
- US, Automotive, and European Norm color codes
- UL and CSA approvals
- Molded PUR (polyurethane) body provides strain relief
- Receptacles are epoxy sealed to prevent ingress of moisture
- Available with PUR/PVC cable for high flex operations
- PUR, PVC and Irradiated PVC cable
- Shielded DC connector available
- 100% computerized testing
- Euro DC style available with LED's in straight and right angle body styles
- Field attachable connectors