




Micro Style Plugs



Series Types: RKT/RKWT

Micro Style, DC Single Keyway : SJOO Cable

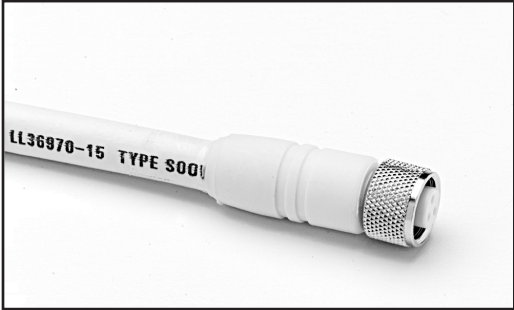

- 250V, 18AWG, European color code
- Single keyway, M12 x 1 threads
- IP68 NEMA 6P rating, UL and CSA
- SJOO offers superior resistance to oils and chemicals and abrasions


Order Information

Face View		
Poles	4	4
Color Code	1 = Brown 2 = Blank 3 = Blue 4 = Black	1 = Brown 2 = White 3 = Blue 4 = Black
Current Rating	4 A	4 A
Conductors	3/18AWG	4/18AWG


Female Part Number

Straight	RKT 4/3-631/xx	RKT 4-629/xx
Right Angle	RKWT 4/3-631/xx	RKWT 4-629/xx

Dimensional Data

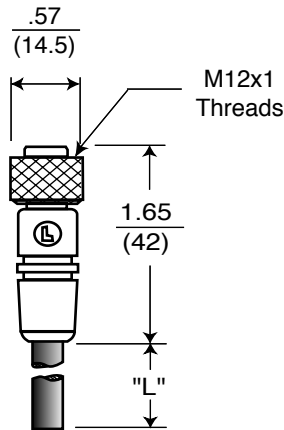

STRAIGHT FEMALE
RKT

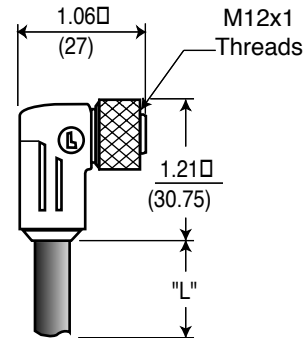

RIGHT ANGLE FEMALE
RKWT

Technical Data

1. Application Class	-40°C to +90°C	Dielectric Withstanding Voltage:	2 KVAC RMS/60sec
2. Materials:		Insulation Resistance:	>10 ⁹ Ω
Body:	PUR, yellow	5. Agency Approvals:	
Contact:	Brass, gold plated	UL Recognition :	E104696
Insert:	PUR	CSA Certification :	LR101540-1
Coupling Nut:	Brass, nickel plated	6. Cable:*	
Insert:	PUR	18 AWG Conductor:	UL-SJOO 41 x 34 high-flex bare copper stranding, yellow jacket
3. Mechanical Data:		* Reference pages H3-H6 for additional cable specifications	
Protection:	IP68, NEMA 6P (in fully locked position only)		
Insertion Force:	≤3.0N .67 LBS		
Withdrawal Force:	≥1.0N .22 LBS		
Shock:	IEC 68-2-27		
Vibration:	IEC 68-2-6		
4. Electrical Data:			
Contact Resistance:	≤5mΩ		
Current Rating:	4 A		
Working Voltage:	250 V		

Cable Lengths & Options

xx - Standard cable available in 2 meter (2M), 5 meter (5M), and 10 meter (10M).

Consult factory for special cable lengths. Customer supplied cable and optional cable types can be produced. Consult Application Engineering Department with exact requirements.